

Adjusting the movements of the robotic platform through inverse kinematics

Igor Nevliudov
ORCID 0000-0002-9837-2309
*Department of Computer-Integrated Technologies,
Automation and Robotics
Kharkiv National University of Radio Electronics
Kharkiv, Ukraine
igor.nevliudov@nure.ua*

Dmytro Gurin
ORCID 0000-0002-2272-5227
*Department of Computer-Integrated Technologies,
Automation and Robotics
Kharkiv National University of Radio Electronics
Kharkiv, Ukraine
dmytro.gurin@nure.ua*

Vladyslav Yevsieiev
ORCID 0000-0002-2590-7085
*Department of Computer-Integrated Technologies,
Automation and Robotics
Kharkiv National University of Radio Electronics
Kharkiv, Ukraine
vladyslav.yevsieiev@nure.ua*

Abstract — The paper presents an approach to the development of a control system for a quadruped robotic platform using inverse kinematics. The solution enables accurate movement of the robot's legs to achieve stable motion and balancing under uncertain terrain conditions. The kinematic model is calculated using FreeCAD tools and implemented in a control code through the transformation of joint angles into PWM signals for servo drives. A simulation model in MATLAB Simulink was created to test the stabilization algorithm. The obtained results demonstrate the ability of the system to correct the robot's posture and maintain balance in real time, even under significant external disturbances.

Keywords— quadruped robot, inverse kinematics, PID control, MATLAB Simulink, robotic balance, FreeCAD simulation, robotics, industry 5.0.

I. INTRODUCTION

Research in the field of robotics is one of the promising areas in the development of mobile robots aimed at timely and successful implementation of search operations in various potentially dangerous and unfavorable conditions for people, such as heterogeneous disasters, natural disasters, incidents of local or individual scale, etc. [1].

Currently, the number of robots designed to search for victims of natural and man-made disasters is growing sharply. Basically, such are based on the need to overcome obstacles for which rescuers, search animals and flying drones would be less effective [2]. Very often, such robots are based on methods of movement from both living creatures and mechanisms already created in the past. It is also important to note the growing popularity of collaborative robots that are designed to ensure human safety in the working area of robots [3]. Thus, in the context of the growing demand for

autonomous and stable mobile platforms, algorithms that ensure precise positioning of robot limbs and adaptation to environmental changes are of particular importance [4]. The use of inverse kinematics allows not only to implement movement in a complex environment, but also to create the prerequisites for the implementation of balancing algorithms that contribute to increasing the efficiency of the mobile platform.

II. PLATFORM ADJUSTMENT

To facilitate users in moving the end member of the robot limbs to specific positions, geometric measurements and the inverse kinematics method [5-8] are required. This method uses input position coordinates in the form of X, Y, and Z. The output of inverse kinematics is the angle formed at the joint.

In Figure 1 (where the initial values measured by FreeCAD tools for calculating inverse kinematics are listed in Table 1), the quadruped robot has 3 joints on each leg. The angle is formed by the joint, i.e. there is a pelvic angle (A_0), a thigh angle (A_1), and a lower leg angle (A_2).

In the control code itself, the values of these angles are converted into PWM values to move the servo via the servo driver.

The inverse kinematic functions, which will be used for calculations, require the input of the X, Y, and Z coordinate axes in the following form: the X axis represents the robot's forward and backward movements, the Y axis represents the robot's right and left movements, and the Z axis represents the robot's up and down movements.

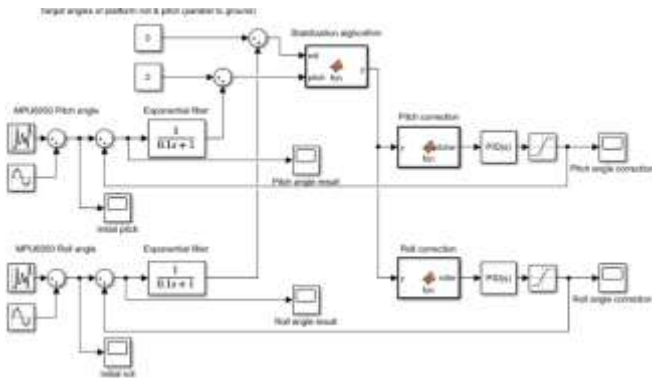


Figure 2. Balancing block system

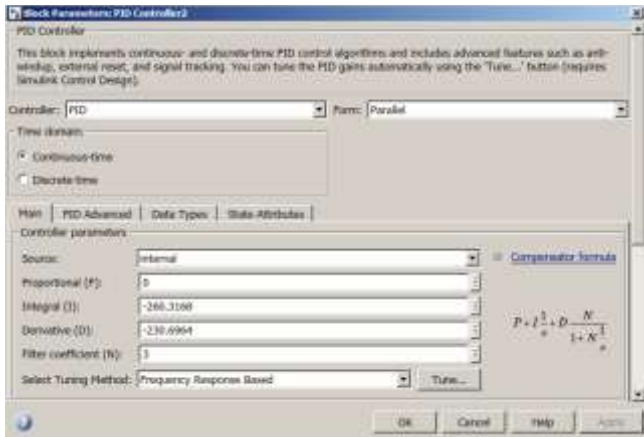


Figure 3. Results of PID controller tuning

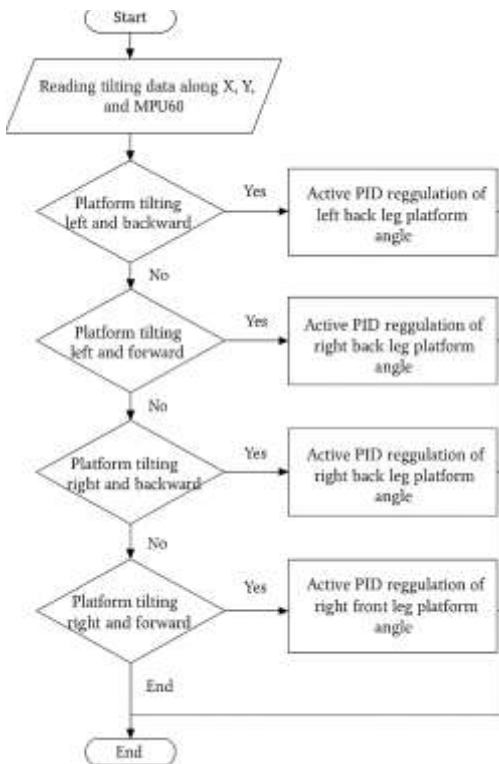


Figure 4. Developed balancing algorithm

The algorithm is designed to stabilize a platform using PID control based on tilt data received from an MPU60 sensor along the X and Y axes. It continuously reads the tilt data and determines the direction of the tilt. Depending on the tilt direction (left-backward, left-forward, right-backward, or right-forward), it activates PID regulation for the corresponding leg of the platform. This helps to adjust the platform angle and maintain balance. The process repeats in a loop to provide real-time stabilization.

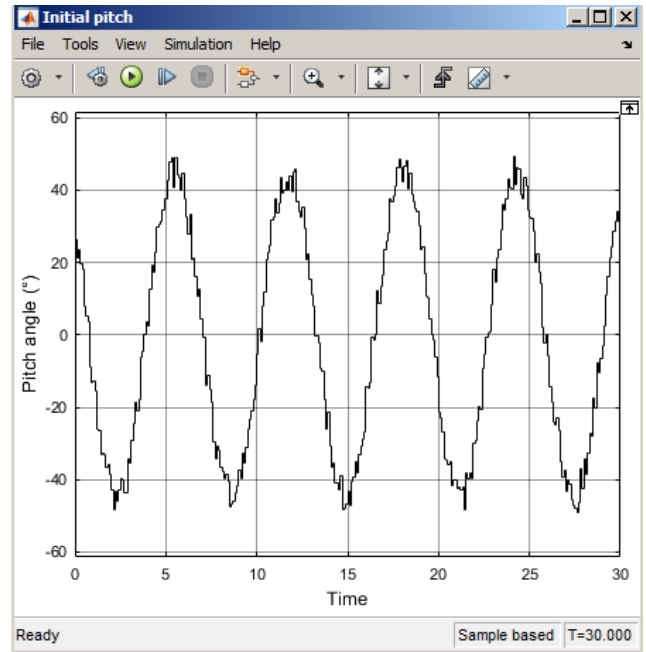


Figure 5 – Graph of initial inclination values from the gyroscope

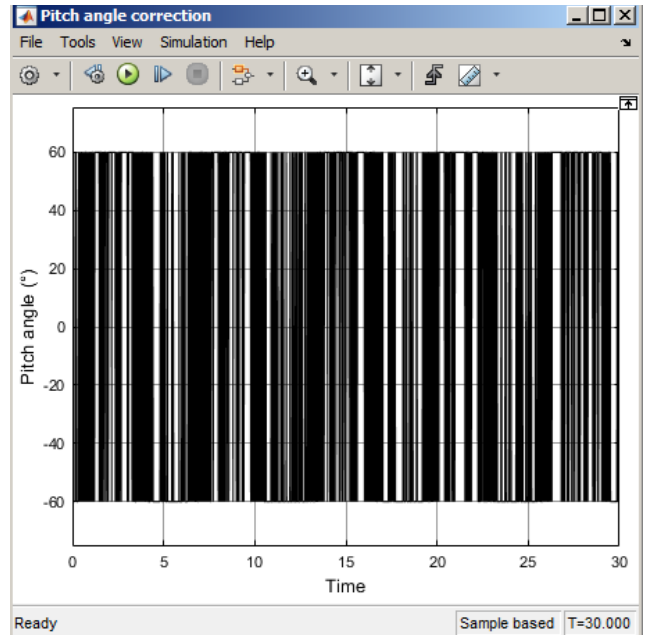


Figure 6. Graph of correction slope values

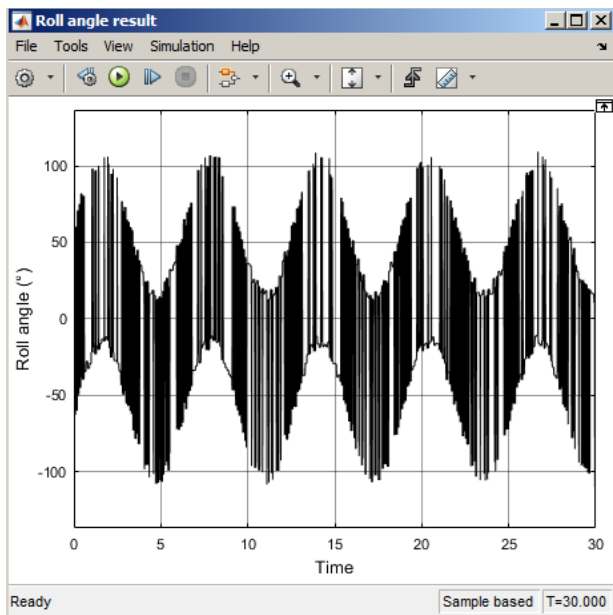


Figure 7. Graphs of correction slope values

IV. CONCLUSION

Despite the disadvantage of the block system in the absence of an ideal simulation of realistic non-extreme physical conditions of platform operation, taking into account inertia and non-momentary deflections of the platform after correction, it can be seen in Figure 7 that the system still corrects the final slope values close to zero.

The results demonstrate the potential of using a decentralized control architecture to ensure stable behavior of a humanoid robot in real time. The integration of inverse kinematics, fuzzy logic, and PID controllers allowed to achieve a high level of adaptability even under limited hardware resources. This confirms the feasibility of using the presented approach in an educational environment and in further scaling to more complex robotic platforms.

Thus, the use of inverse kinematics in combination with a PID control system allows achieving high-precision control of the movement of the limbs of a mobile platform, which ensures the stability of its position under dynamic loads. The model, developed in the MATLAB Simulink environment, demonstrated the ability of the system to effectively compensate for external influences by adjusting the tilt angles. Further research involves improving the model taking into account the inertial characteristics of the real environment and implementing adaptive stabilization methods to expand the functionality of autonomous robotic platforms.

In further research, it is planned to improve the simulation taking into account the dynamics of the platform, implement sensor integration with the vision system, and develop an agent environment for group functioning of robots in the context of Industry 5.0.

REFERENCES

- [1] Невлюдов І. Ш. Технічне та програмне забезпечення розробки малогабаритного мобільного робота : монографія / І. Ш. Невлюдов, В. В. Євсєєв, Д. В. Гурін // Кривий Ріг: Криворізький фаховий коледж Державного некомерційного підприємства «Державний університет «Київський авіаційний інститут», 2025. – 355 с. - DOI : <https://doi.org/10.30837/978-617-8332-74-7>.
- [2] Abu-Jassar, AT, Attar, H., Amer, A., Lyashenko, V., Yevsieiev, V., & Solyman, A. (2025). Development and Investigation of Vision System for a Small-Sized Mobile Humanoid Robot in a Smart Environment. *International Journal of Crowd Science*, 9(1), 29-43.
- [3] Невлюдов, І. Ш., Євсєєв, В. В., & Гурін, Д. В. (2025). MODEL DEVELOPMENT OF DYNAMIC REPRESENTATION A MODEL DESCRIPTION PARAMETERS FOR THE ENVIRONMENT OF A COLLABORATIVE ROBOT MANIPULATOR WITHIN THE INDUSTRY 5.0 FRAMEWORK. *Системи управління, навігації та зв'язку. Збірник наукових праць*, 1(79), 42-48.
- [4] Tranzatto M., & et al. (2022). CERBERUS: Autonomous Legged and Aerial Robotic Exploration in the Tunnel and Urban Circuits of the DARPA Subterranean Challenge. *Field Robotics*, 2023, 2. 274-324. URL: <http://dx.doi.org/10.55417/fr.2022011>.
- [5] Prayogo R. C., & et al. (2018). Quadruped Robot with Stabilization Algorithm on Uneven Floor using 6 DOF IMU based Inverse Kinematic. 2018 5th International Conference on Information Technology, Computer, and Electrical Engineering (ICITACEE), Semarang, Indonesia, 2018, pp. 39-44. URL: <https://doi.org/10.1109/ICITACEE.2018.8576969>.
- [6] Meng X., & et al. (2023). Trot Gait Stability Control of Small Quadruped Robot Based on MPC and ZMP Methods. *Processes*. 2023; 11(1):252. URL: <https://doi.org/10.3390/pr11010252>.
- [7] Liu Y., & et al. (2020). Research on the Posture Control Method of Hexapod Robot for Rugged Terrain. *Applied Sciences*. 2020; 10(19):6725. URL: <https://doi.org/10.3390/app10196725>.
- [8] Attar, H., Abu-Jassar, A. T., Amer, A., Lyashenko, V., Yevsieiev, V., & Khosravi, M. R. (2022). Control system development and implementation of a CNC laser engraver for environmental use with remote imaging. *Computational intelligence and neuroscience*, 2022(1), 9140156.
- [9] Yevsieiev, V. Comparative Analysis of the Characteristics of Mobile Robots and Collaboration Robots Within INDUSTRY 5.0. / V. Yevsieiev, D. Gurin // Sectoral research XXI : characteristics and features : collection of scientific papers "SCIENTIA" with proceedings of the VI International Scientific and Theoretical Conference, September 8, 2023. - Chicago : European Scientific Platform, 2023. - P. 92-94.
- [10] Nevludov, I., Yevsieiev, V., Lyashenko, V., & Ahmad, M. A. (2021). GUI Elements and Windows Form Formalization Parameters and Events Method to Automate the Process of Additive Cyber-Design CPPS Development.
- [11] Demska, N., Yevsieiev, V., Maksymova, S., & Ababneh, J. (2025). DECISION-MAKING MODEL FOR CONTROLLING A COLLABORATIVE ROBOT-MANIPULATOR BASED ON THE SENSOR FUSION METHOD AND CNN APPROACH TO RULE FORMATION. *Multidisciplinary Journal of Science and Technology*, 5(6), 846-859.
- [12] Невлюдов, І. Ш., Євсєєв, В. В., & Гурін, Д. В. (2025). MODEL DEVELOPMENT OF DYNAMIC REPRESENTATION A MODEL DESCRIPTION PARAMETERS FOR THE ENVIRONMENT OF A COLLABORATIVE ROBOT MANIPULATOR WITHIN THE INDUSTRY 5.0 FRAMEWORK. *Системи управління, навігації та зв'язку. Збірник наукових праць*, 1(79), 42-48.