

Airy Pulse Transformation by an Accelerated Medium Boundary

O.V. Zhyla,
Kharkiv National University of Radio
Electronics
Kharkiv, Ukraine
email: Olha.kuryzheva@nure.ua

A.G. Nerukh
Kharkiv National University of Radio
Electronics
Kharkiv, Ukraine
email: Nerukh@gmail.com

A.S. Gnatenko
Kharkiv National University of Radio
Electronics
Kharkiv, Ukraine
email: gnatenko-s@ukr.net

Abstract — In the statement of a problem with a moving boundary there is one more idealization, namely, movement stationarity assuming that the movement has begun at infinite past time. Abandoning this idealization, by considering a movement that begins at a finite moment of time, leads to the appearance of new peculiarities in the wave transformation on a moving boundary. In this paper such peculiarities are considered with an abrupt uniform movement of a boundary beginning at zero moment of time, as well as with a smooth “turning on” of a boundary movement according to a relativistic uniformly accelerated law. In the latter approach the continuity of a boundary velocity change allows the development of the evolution of the wave transformation process to be traced.

Keywords— uniform accelerated movement of a boundary; resolvent method; electromagnetic Airy pulse.

I. INTRODUCTION

Special features of wave transformations, become apparent in the case of smooth non-stationarity of the moment when the boundary velocity reaches the magnitude of the wave phase velocity continuously. Such non-stationarity is realized by non-uniform movement of the boundary. It is important to consider the scattering of electromagnetic waves by a boundary, which makes irregular movement.

The peculiarities of moving non-stationary boundary have already been described in works [1-3], but the study of the influence on the propagation of the wave of inhomogeneous motion in these works has not been carried out.

First, let's consider the problem of transforming the Airy pulse into a plane boundary that begins to move at a certain point in time, that is, the value of the speed drastically changes from zero to value. The position of the boundary is determined by the characteristic function $\chi(t, x)$, which is equal to the unit in half-space $x > 0$ and zero in half-space $x < 0$. It is supposed that at the zero moment the interface

between the media was motionless, i.e. $\chi^-(t', x') = \theta(x)$.

Let's take a case, if there is a zero moment between each other. $\chi^+(t', x') = \theta(x - x_s(t))$, but the medium on both sides of the border remain stationary.

An integral equation describing an electromagnetic field in this case has the form:

$$E = F - \frac{v^2 - v_1^2}{2v^2 v_1} \frac{\partial^2}{\partial t^2} \times \int_0^{+\infty} dt' \int_{-\infty}^{+\infty} dx' \theta\left(t - t' - \frac{|x - x'|}{v}\right) \chi^+(t', x') E(t', x'), \quad (1)$$

where v and v_1 - the phase velocities of the waves before and after the appearance of the boundary of separation of environment.

The resolvent of the integral equation (1) is described by the expression:

$$\hat{R} = -\chi(x - ut) \frac{v^2 - v_1}{2v_1 v^2} \frac{\partial}{\partial t} \left\{ \frac{\partial}{\partial t} \theta\left(t - t' - \frac{|x - x'|}{v_1}\right) + \frac{v - v_1}{v + v_1} \frac{\partial}{\partial t} \theta\left(v_1 t - x - \frac{v_1 - u}{v_1 + u} (v_1 t' + x')\right) \right\} \chi(x' - ut'), \quad (2)$$

As a result of the counter movement of the momentum and the boundary with the corresponding ratio between the velocities $|u| < v_1$ a secondary pulse is formed:

$$E_{Tr1}(t, x) = \frac{v_1}{v} \frac{v - u}{v_1 - u} \frac{2v_1}{v + v_1} \text{Ai}\left(-\frac{v_1}{v} \frac{v - u}{v_1 - u} \frac{t}{T} + \frac{v - u}{v_1 - u} \frac{x}{vT}\right). \quad (3)$$

In the case of a crossover movement with superluminal velocity $-u > v_1$ two secondary ones are formed:

$$E_{Tr2}(t, x) = \frac{v_1}{v} \frac{v - u}{v_1 - u} \frac{v + v_1}{2v} \text{Ai}\left(-\frac{v_1}{v} \frac{v - u}{v_1 - u} \frac{t}{T} + \frac{v - u}{v_1 - u} \frac{x}{vT}\right) + \frac{v_1}{v} \frac{v - u}{v_1 + u} \frac{2v}{v + v_1} \text{Ai}\left(-\frac{v_1}{v} \frac{v - u}{v_1 + u} \frac{t}{T} - \frac{v - u}{v_1 + u} \frac{x}{vT}\right). \quad (4)$$

Thus, when the speed of the border is greater than the velocity of the pulse, it will reach the observation point later than the moment of the beginning of the movement of the limit. This means that at this moment splitting of the pulse into two others will occur as a result of a sharp change in the value of the dielectric permittivity of the medium. After passing the momentum of the boundary, two pulses are formed which propagate with a new velocity v_1 in opposite directions.

Reflected from the limit of momentum are found by substituting expressions (3) and (4) into the integral equation (1) when the observation point is in the region $x < ut$. In the case of $-u > v_1, v$ the reflected pulses can not

From the analysis of these expressions it follows that the denominator Ω^+ vanishes at two points

$$\begin{aligned}\hat{t}_1^+ &= t + \frac{x}{v_1} = 2\xi \left(\frac{v + \sqrt{v^2 - v_1^2}}{v_1} \right), \\ \hat{t}_1^- &= t + \frac{x}{v_1} = 2\xi \left(\frac{v - \sqrt{v^2 - v_1^2}}{v_1} \right),\end{aligned}\quad (10)$$

and these expressions are valid for $v/v_1 > 1$. In the opposite case, the radical expression will be purely imaginary.

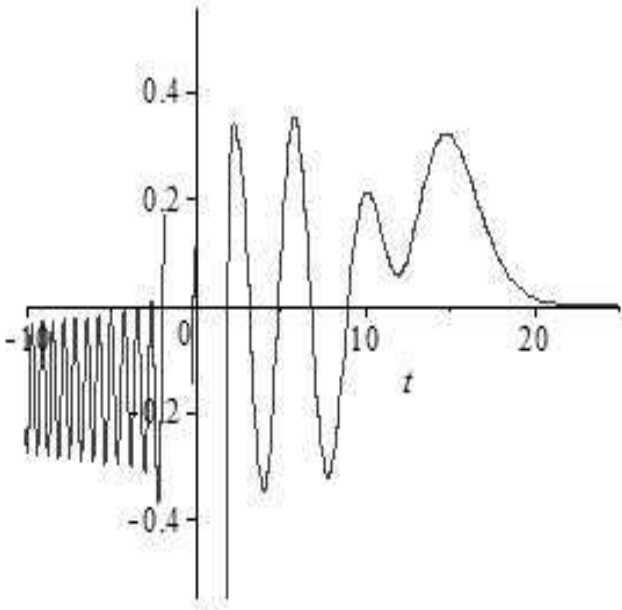


Fig. 4. – The counter-current motion of the Airy pulse and the limits at the instant when their velocities were equalized when $p = 10$.

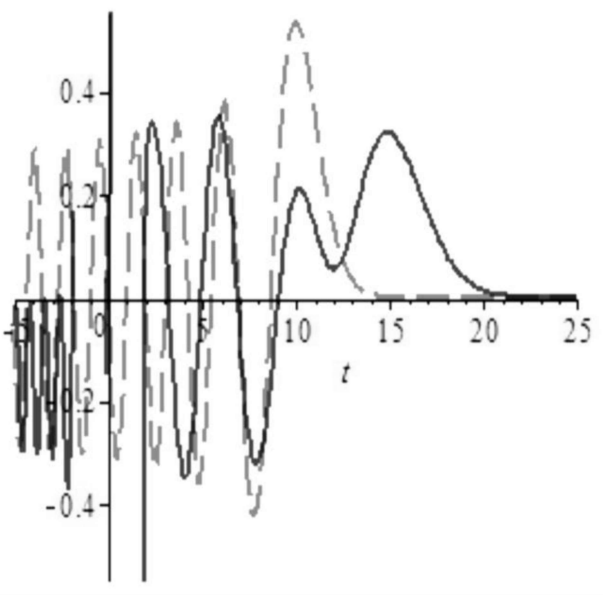


Fig. 5. Comparison of initial Airy pulse (dashed line) and pulse transmitted through the boundary $E_{sc}(t, x)$ (solid line) at the point $x = 1$ at $p = 10$.

Denominator Ω^- vanishes also at two points

$$\begin{aligned}\hat{t}_2^+ &= t - \frac{x}{v_1} = 2\xi \left(\frac{v + \sqrt{v^2 - v_1^2}}{v_1} \right), \\ \hat{t}_2^- &= t - \frac{x}{v_1} = 2\xi \left(\frac{v - \sqrt{v^2 - v_1^2}}{v_1} \right),\end{aligned}\quad (11)$$

and determined also by $v/v_1 < 1$.

The presence of singular points explains the field breaks as a result of interaction with the boundary. Moreover, the break lines form two intersecting bands in the space-time impulse propagation region, where the impulse does not exist.

The proposed method can be applied to physico-mathematical studies of parameters modern lasers: micro- and nanolasers [8-9].

III. CONCLUSIONS

A complex problem is solved, when the medium separation limit gradually reaches the value of the pulse velocity. Expressions for the Airy transformed pulses are obtained and it is shown that at the moment of reaching the limit of the velocity of the pulse, two infinite gaps are formed. In this case, the interaction process is controlled by selecting the value of the starting parameter. At the moment of reaching the limit of the velocity of the pulse there is a tail break so that on one side of the boundary remains cut off the main pulses of the pulse, and on the other side - the oscillating tail.

REFERENCES

- [1] Krasilnikov V.N., Lutchenko L.N. Principle of seeming location of an interface and generalization of V.A.Fock's reflection formulae in the case of moving boundaries, Leningrad university Publish. House, 1973, vol. 12, pp.150-157
- [2] Buldyrev V.S., Maslova G.N. Reflection of modulated wave from moving boundary of arbitrary shape, Proc VIII USSR Symp. Waves Diffraction Propag., Moscow, 1982, vol.3, pp 280-283
- [3] Pogorzelskiy R.J. Electromagnetic scattering from a radially moving spherical discontinuity, J Appl.Phys.,1973, vol. 44(1), pp 168 – 173.
- [4] Landau, LD, E. Livshits. Theoretical Physics: studies. manual for universities. In 10 t., T. I. Mechanics, FIZMATLIT, Moscow, 2004, p.42-43
- [5] Nerukh A., Sakhnenko N., Benson T., Sewell Ph. Non-stationary electromagnetic, Singapore: Pan Stanford Publishing Pte., 2013,p. 596
- [6] Nerukh, A., Kuryzheva, O., Benson, T. Time-spatial structure of airy pulse in non-stationary environment. Optical and Quantum Electronics, (2018) 50: 52, pp. 1-10.
- [7] Kuryzheva, O.V., Nerukh, A.G. Transformation of the airy pulse by a jump-like change of the medium permittivity in time, Telecommunications and Radio Engineering, vol. 77, no.12, pp. 1017-1028, 2018.
- [8] Yu.P. Machekhin, Yu.S.Kurskoy, A.S.Gnatenko, V.A. Tkachenko, Nanolaser superradiation in information and measuring procedures, Telecommunications and Radio Engineering, vol. 77, no.13, pp. 1179-1186, 2018.
- [9] Yu.P. Machekhin, A.S.Gnatenko, Yu.S.Kurskoy, Photonic crystal nanolasers as optical frequency standards, Telecommunications and Radio Engineering, vol. 77, no.13, pp. 1169-1177, 2018.